

NUBE

Version
Slim motor 800 m³/h

Collection
Design+

EAN code
8034122363233



Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

- Perimeter suction
- Electronic control
- Metallic grease filter, removable and washable
- Combined regenerable
- Carbon.Zeo filter (optional)
- Remote control included
- Motor sold separately
- Dialogue system with auto mode

Cut-out size: 505 x 940 mm

OPTIONAL ACCESSORIES

- KACL.396**
Flange - Ø200
- KACL.398**
Flange - Ø150
- KACL.770#41F**
Remote under-roof 1100 m3/h
Brushless
- KACL.782#49F**
Slim motor 800 m3/h
- KACL.786#41F**
Outdoor extractor fan 1000 m3/h
- KACL.789**
Junction for ceiling hoods
- KACL.796#4AF**
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**
Remote under-roof motor 1300 m3/h
- KACL.798#41F**
Remote under-roof motor 950 m3/h
- KACL.928**
Filters spare
- KACL.931**
Filters Carbon.Zeo - Spare
- KACL.939#BF**
Ceiling re-circulation filtering kit (only for Slim Motor)
- KACL.953#BF**
Carbon.Zeo vertical outlet ceiling filter unit kit

TECHNICAL FEATURES

- Installation type**
Ceiling
- Dimensions**
90 cm
- Finishing**
Scotch brite stainless steel (AISI 304)
- Type of control**
Electronic control
- Speed**
3 + boost
- Filter**
3 x Metallic filter "Base" - 290x267 mm
- Maximum distance**
Gas hob: 150 cm
Electric hob: 150 cm

PACKAGING:WEIGHTS AND VOLUMES



- NUBE Gross weight**
25.6 kg
- Net weight**
22.8 kg
- Volumes**
0.14 m³
- Packaging size**
Length
1120 mm
Height
190 mm
Depth
670 mm
- REMOTE MOTOR Slim motor 800 m³/h Gross weight**
6.5 kg
- Net weight**
5.2 kg
- Volumes**
0.04 m³
- Packaging size**
Length
575 mm
Height
195 mm
Depth
395 mm

CONSUMPTION AND CONNECTION FEATURES

- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**
540 m³/h
I.E.C. 61591
- Maximum noise level**
66 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
600 Pa
- Max. motor power**
150 W
- ENERGY CLASS**
B



Nube 90 - slim motor

NUBE

Version
Slim motor 800 m³/h


Collection
Design+

EAN code
8034122363233

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW- I.E.C.60704-2-13	52	58	63	66
Capacity (m3/h) I.E.C.61591	245	350	470	540
Maximum pressure (Pa)	400	480	530	600
Power (W)	100	110	120	150
Air outlet	220x90	220x90	220x90	220x90

CAPACITY / PRESSURE

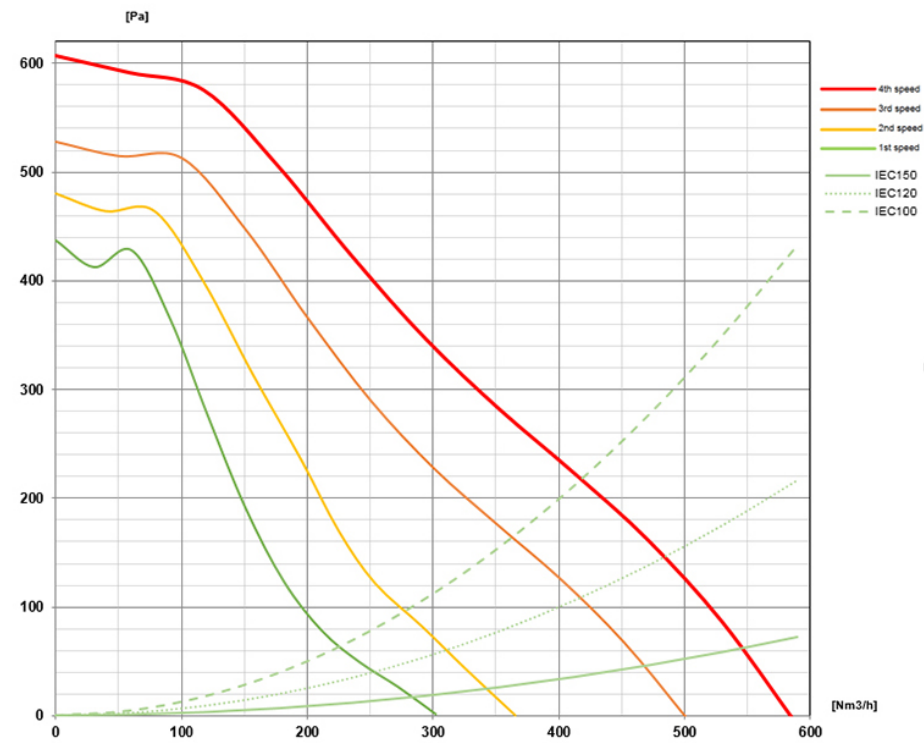


NUBE

Version
Slim motor 800 m³/h

Collection
Design+

EAN code
8034122363233

ENERGY LABEL

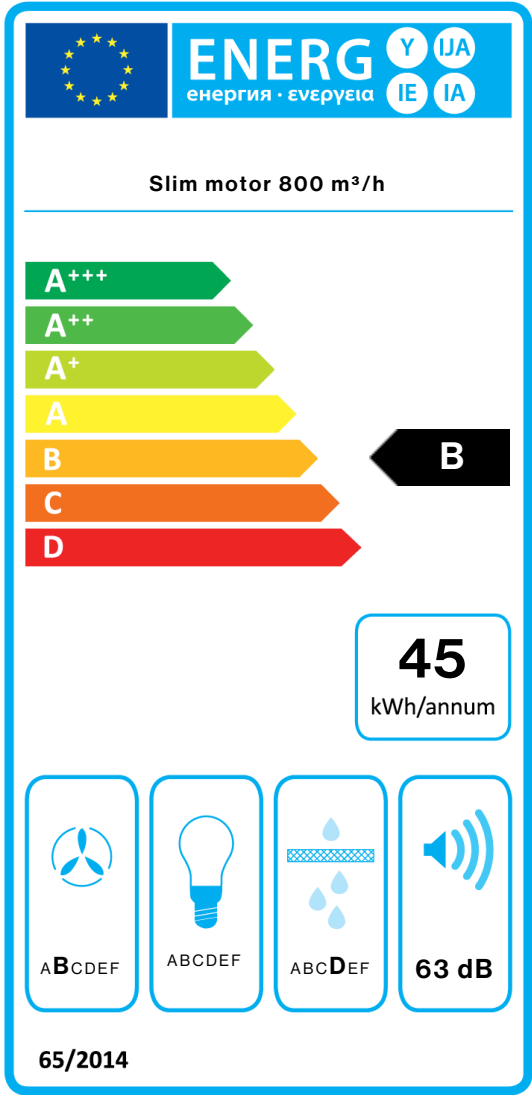

PF		
S	Falmec Spa	
M	Slim motor 800 m³/h	
AEC	45,4	kWh/a
EEC	B	
FDE	24,2	
FDEC	B	
LE	0,0	
LEC	0	
GFE	65,1	
GFEC	D	
Qmin	245,0	m³/h
Qmax	470,0	m³/h
Qboost	540,0	m³/h
SPEmin	52	dBa
SPEmax	63	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	58,6	
Qbep	332,0	m³/h
Pbep	297	Pa
Qboost	540,0	m³/h
Wbep	113,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.