

PLANE PLUS

Version
Plus - Wall - 90 cm - Black -
800 m3/h

Designer

Collection
Design

EAN code
8034122367132


FEATURES

Perimeter suction
Electronic control
Metallic grease filter, removable
and washable
Remote control (optional)
Dimmable lighting
Dynamic Light (2700K - 5600K)
Dialogue system with auto mode
Carbon.Zeo Microtech filter
(optional)

Availability Carbon.Zeo filter
KACL.1039 for hoods produced
from Sept. 2024

OPTIONAL ACCESSORIES

105080053
Remote control
KACL.1032#NF
Extension H700 Wall - Black
KACL.1033#NF
Extension H960 Wall - Black
KACL.1039
Carbon.Zeo Microtech filter
KACL.865
Air flow conveyor for re-
circulation version (Wall)



Photograph is for information purposes only
It may not correspond to the selected version.

TECHNICAL FEATURES

Installation type
Wall
Dimensions
90 cm
Finishing
Painted black steel
Motor
800 m³/h
Type of control
Electronic control
Speed
3 + boost
Lighting
Strip Led - 2700 K / 5600 K
Minimum distance
Gas hob: 60 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND
VOLUMES

Gross weight
28.4 kg
Net weight
23 kg
Volumes
0.28 m³
Packaging size
Length
995 mm
Height
480 mm
Depth
595 mm

CONSUMPTION AND
CONNECTION FEATURES

Maximum consumption
280 W
Voltage
220-240V
Frequency
50-60Hz

MOTOR TECHNICAL SHEET

Maximum capacity
641 m³/h
I.E.C. 61591
Maximum noise level
69 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
500 Pa
Max. motor power
245 W
ENERGY CLASS
A

PLANE PLUS

Version
Plus - Wall - 90 cm - Black -
800 m3/h

Designer


Collection
Design

EAN code
8034122367132

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	51	61	66	69
Capacity (m3/h) I.E.C.61591	313	468	573	641
Maximum pressure (Pa)	390	420	480	500
Power (W)	145	175	215	245
Air outlet	150	150	150	150

CAPACITY / PRESSURE

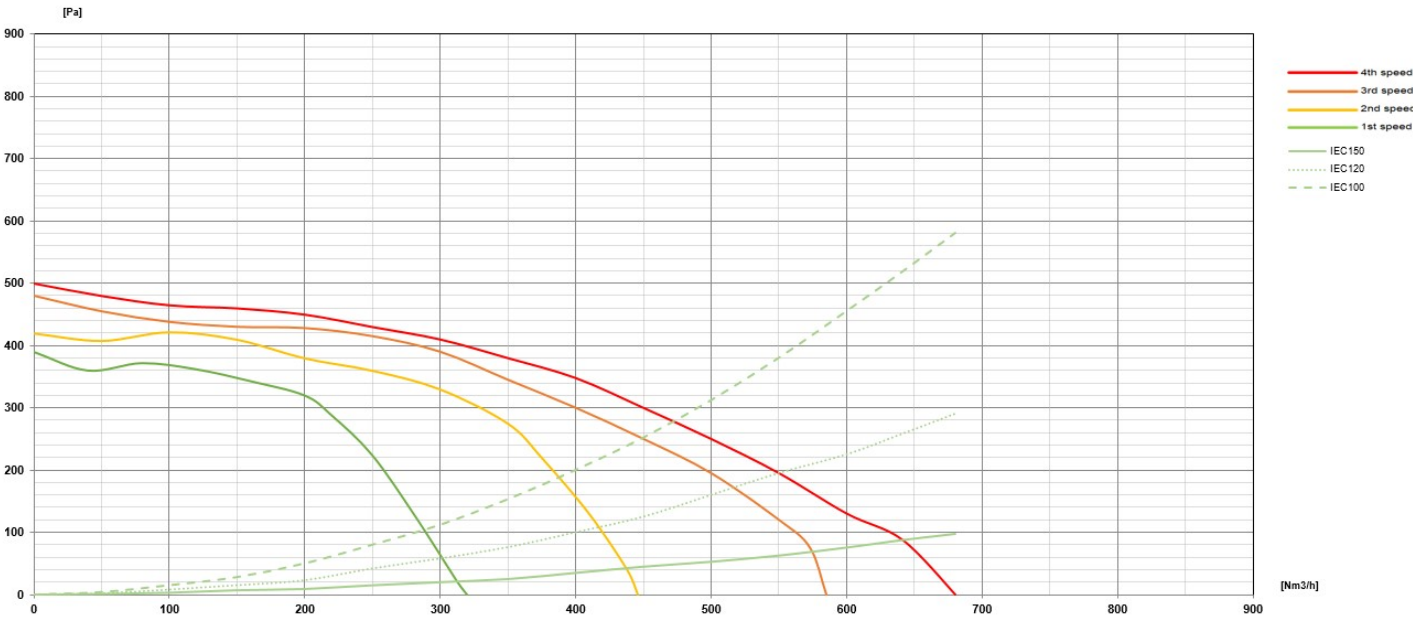

PLANE PLUS


Version
Plus - Wall - 90 cm - Black -
800 m3/h

Designer

Collection
Design

EAN code
8034122367132

ENERGY LABEL

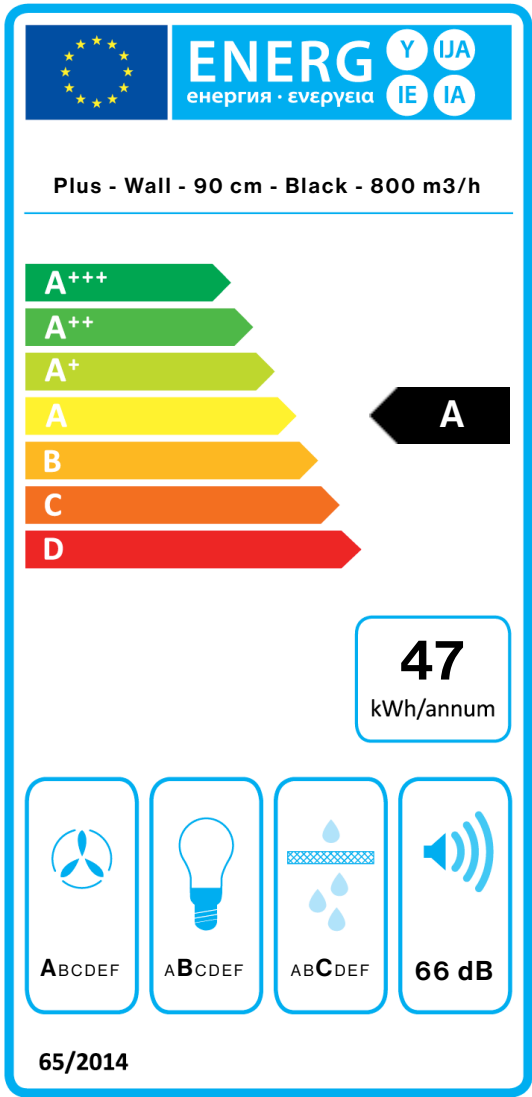

PF		
S	Falmec Spa	
M	Plus - Wall - 90 cm - Black - 800 m3/h	
AEC	46,9	kWh/a
EEC	A	
FDE	29,2	
FDEC	A	
LE	22,0	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	313,0	m³/h
Qmax	573,0	m³/h
Qboost	641,0	m³/h
SPEmin	51	dBa
SPEmax	66	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEl	52,1	
Qbep	366,0	m³/h
Pbep	373	Pa
Qboost	641,0	m³/h
Wbep	130,0	W
WL	5,80	W
Emiddle	128	lux
Lwa-SPEmax	66	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). PI_Additional information according to 66/2014 F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point /

Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.