

ZERO EASY

Version
Filtering - Worktop - 84 cm -
Black - 600 m3/h

Designer

Collection
Cooking systems

EAN code
8034122900940

FEATURES

Metallic grease filter, removable and washable
Combined Carbon.Zeo filter, regenable
Available only re-circulation version
Residual heat indicators
Recall function
Keep warm function (44°)
"Touch slider" control
9 cooking levels + boost
Automatic pot detection
Automatic cut-off timer (for each cooking zone)
Timer / minute minder
Safety switch-off / safety lock function
Pause function
Brushless Motor
Automode (suction speed automatically adjusts to cooking power)
4 cooking areas with Flex
Surface technology
Bridge function
Liquid collector
Power level management from 2.8kW to 7.4kW

OPTIONAL ACCESSORIES

KACL.1036
Anti-noise conveyer
KACL.155#NF
Black frame
KACL.965
Carbon.Zeo filter (spare part)

TECHNICAL FEATURES

Installation type
Worktop
Dimensions
84 cm
Finishing
Schott black glass
Motor
600 m³/h
Type of control
Touch control
Speed
9 + boost
Charcoal filter
Carbon.Zeo filter (spare part) (included)



The photograph is purely for information
It may not correspond to the selected version.

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
34 kg
Net weight
27.9 kg
Volumes
0.24 m³
Packaging size
Length
1055 mm
Height
375 mm
Depth
610 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
7560 W
Voltage
220-240V
Frequency
50-60Hz
ENERGY CLASS
A+

ZERO EASY

Version

Filtering - Worktop - 84 cm -
Black - 600 m3/h


Designer

Collection

Cooking systems

EAN code

8034122900940

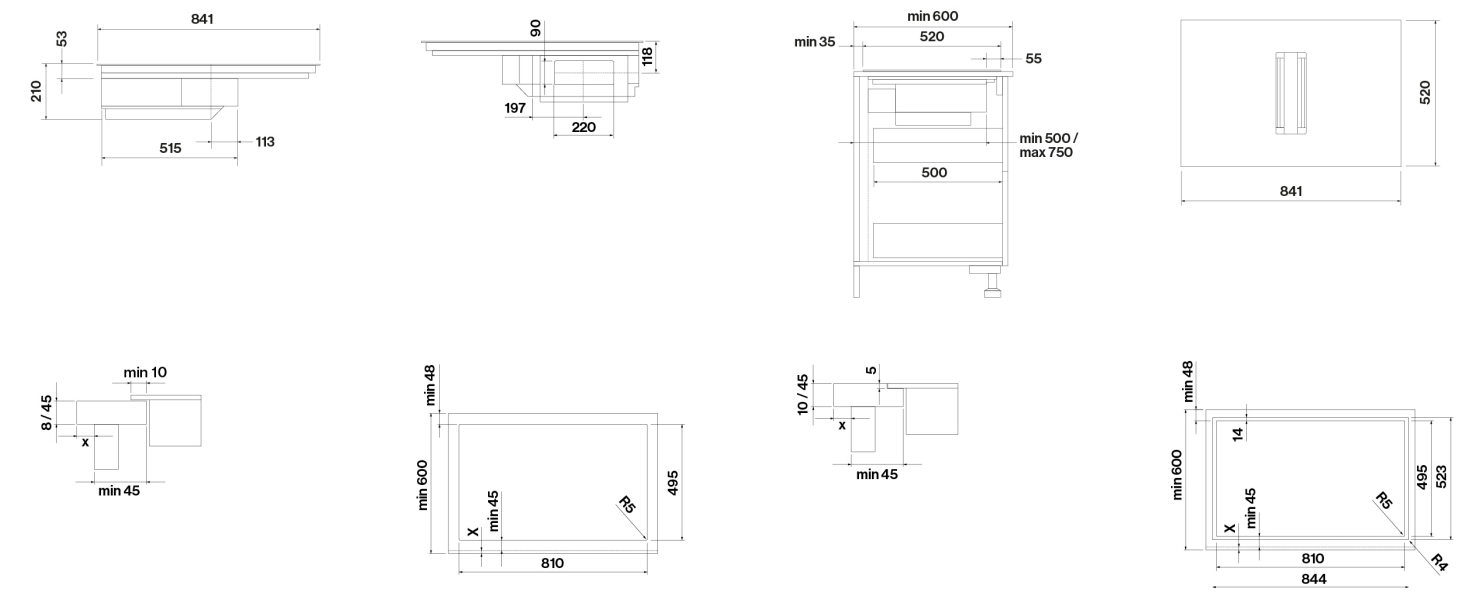

ZERO EASY


Version
Filtering - Worktop - 84 cm -
Black - 600 m3/h

Designer

Collection
Cooking systems

EAN code
8034122900940

ENERGY LABEL

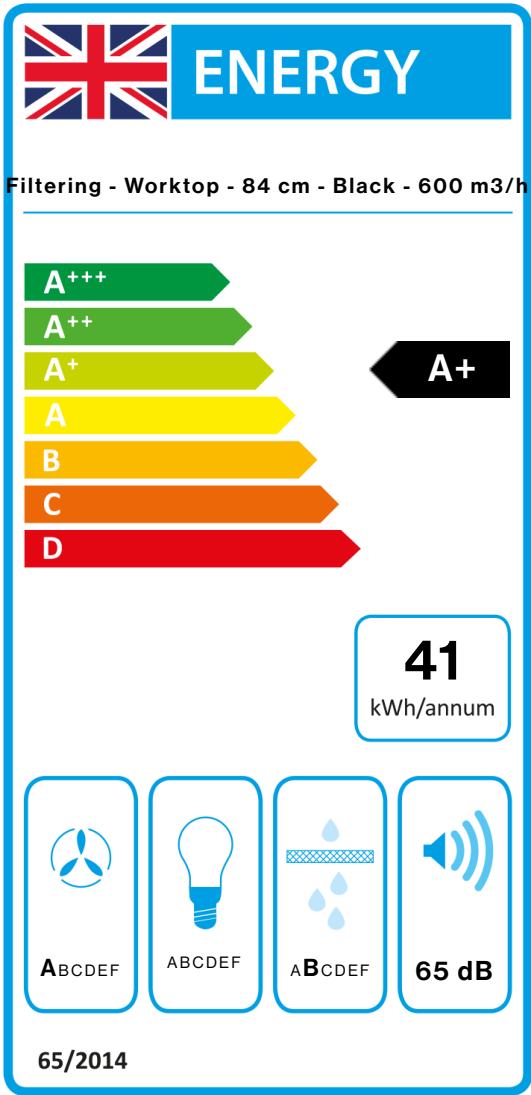

PF		
S	Falmec Spa	
M	Filtering - Worktop - 84 cm - Black - 600 m3/h	
AEC	41,4	kWh/a
EEC	A+	
FDE	34,8	
FDEC	A	
LE	0,0	
LEC		
GFE	87,0	
GFEC	B	
Qmin	380,0	m³/h
Qmax	495,0	m³/h
Qboost	515,0	m³/h
SPEmin	47	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.8	
EEl	39,7	
Qbep	305,0	m³/h
Pbep	665	Pa
Qboost	515,0	m³/h
Wbep	162,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). PI_Additional information according to 66/2014 F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point /

Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.