

VIRGOLA

Version
Evolution - Built-in 90 cm -
Black - 600 m3/h

Collection
Design

EAN code
8034122363585



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Electronic control
Metallic grease filter, removable and washable
Charcoal filter (optional)
Dimmable lighting
Dynamic Light (2700K - 5600K)
Extendable and retractable tempered smoked glass visor

Dimmable led lighting since 04.24.23

OPTIONAL ACCESSORIES

KACL.107
Glass shelf 90 cm
KACL.960
Charcoal filter
KCVJN.00#N
KIT CHIMNEY VIRGOLA-MOVE
H=185 + PROL. H=185
(W/Packaging) BLACK
KCVJN.01#N
KIT CHIMNEY VIRGOLA-MOVE
H=120 (W/Packaging) BLACK

TECHNICAL FEATURES

Installation type
Built-in
Dimensions
90 cm
Finishing
Matte black painted steel
Motor
600 m³/h
Type of control
Electronic control
Lighting
Led 2x1,2 W - 2700 K / 5600 K
Filter
Metallic filter "Base" - 204x207 mm (spare part)
Minimum distance
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


Gross weight
14 kg
Net weight
10.9 kg
Volumes
0.19 m³
Packaging size
Length
995 mm
Height
410 mm
Depth
465 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
230 W
Voltage
220-240V
Frequency
50-60Hz
Plug type
Shuko

MOTOR TECHNICAL SHEET

Maximum capacity
580 m³/h
I.E.C. 61591
Maximum noise level
65 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
480 Pa
Max. motor power
200 W
ENERGY CLASS
B



VIRGOLA

Version
Evolution - Built-in 90 cm -
Black - 600 m3/h


Collection
Design

EAN code
8034122363585

MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Noise level dB(A)re1pW-I.E.C.60704-2-13	47	56	65
Capacity (m3/h) I.E.C.61591	240	350	580
Maximum pressure (Pa)	250	400	480
Power (W)	130	160	200
Air outlet	150	150	150

CAPACITY / PRESSURE

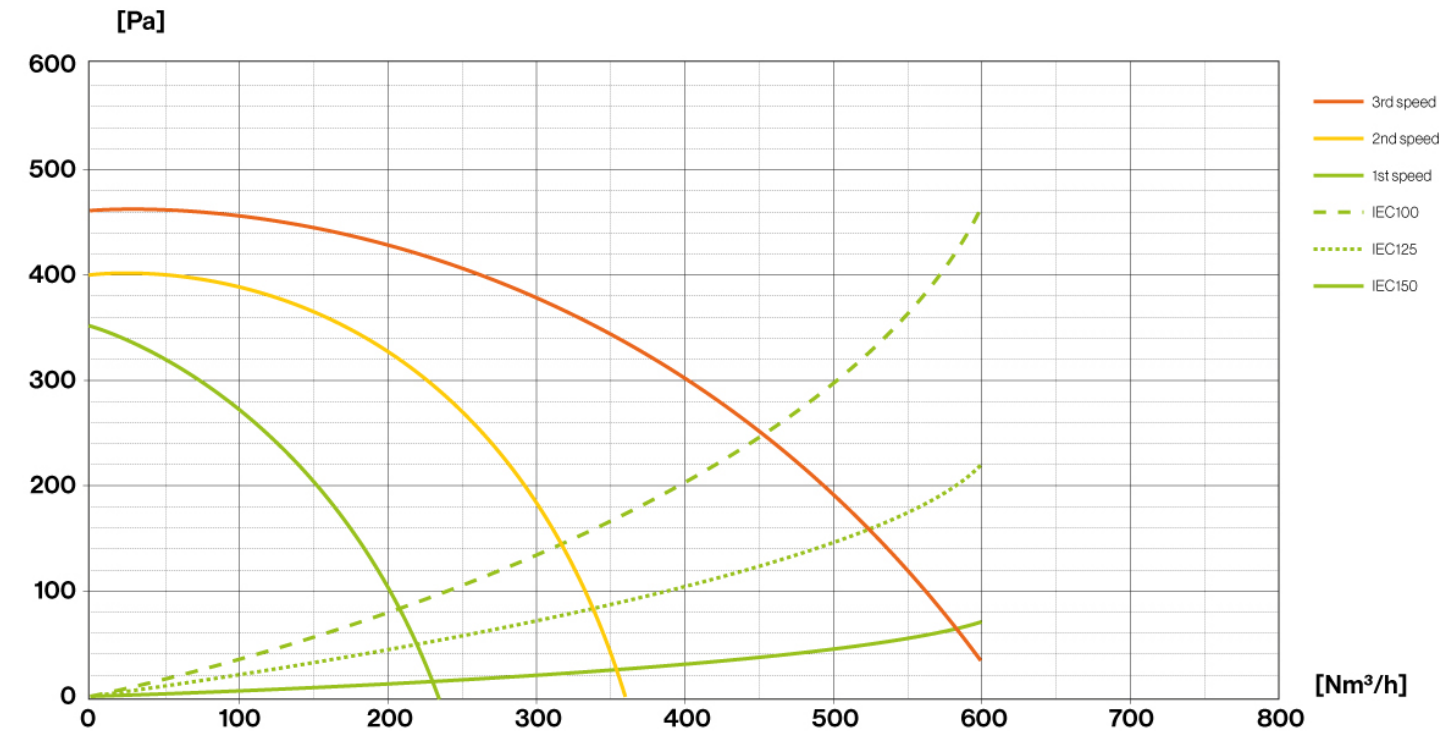


VIRGOLA

Version
Evolution - Built-in 90 cm -
Black - 600 m3/h

Collection
Design

EAN code
8034122363585

ENERGY LABEL

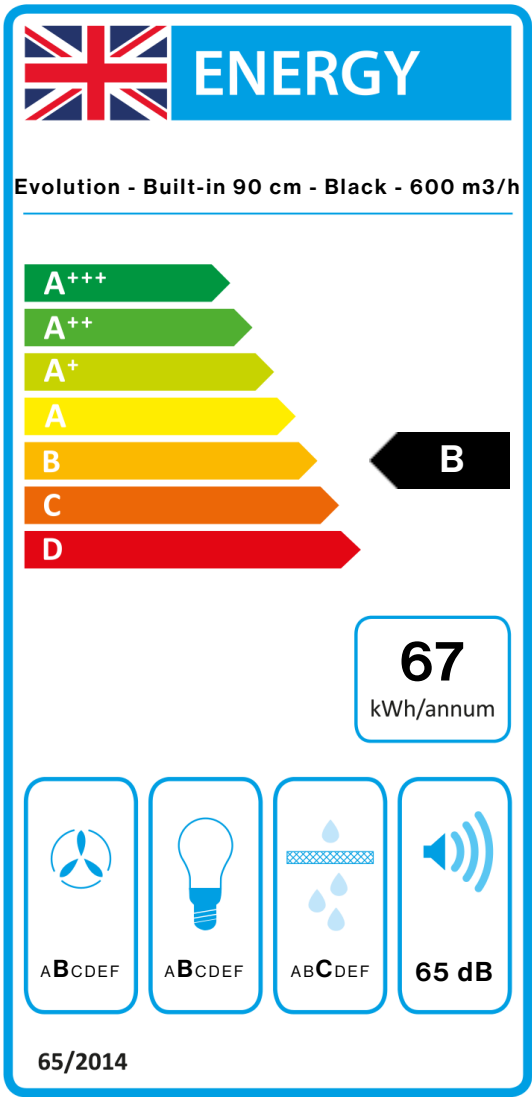

PF		
S	Falmec Spa	
M	Evolution - Built-in 90 cm - Black - 600 m3/h	
AEC	67,4	kWh/a
EEC	B	
FDE	23,2	
FDEC	B	
LE	27,9	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	240,0	m³/h
Qmax	580,0	m³/h
Qboost	580,0	m³/h
SPEmin	47	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,48	W
PI		
F	1,2	
EEl	68,8	
Qbep	360,0	m³/h
Pbep	337	Pa
Qboost	580,0	m³/h
Wbep	145,0	W
WL	5,30	W
Emiddle	148	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.