

Version Worktop - 76 cm - Black glossy/red LED - 600 m³/h
Collection Cooking

TECHNICAL FEATURES

Materials/Finishes Black glossy glass ceramic

Features Timer / minute minder
 Automode (suction speed automatically adjusts to cooking power)
 Flex Surface technology
 Air Slide System to direct the suction
 Emptyable liquid collector

Control "Touch slider" control
 9 cooking levels + boost

Function Filtering

Filters Metallic grease filter, removable and washable
 Carbon.Zeo Microtech regenerable filter

Power Power level management from 2.8kW to 7.4kW

Motor Brushless Motor

Dimensions 76 cm

Cooking Functions Residual heat indicators
 Recall function
 Keep warm function (44°)
 Automatic pot detection
 Automatic cut-off timer (for each cooking zone)
 Safety switch-off / safety lock function
 Pause function
 Bridge function



Photograph is for information purposes only. May not correspond to the selected version

CONNECTION AND CONSUMPTION FUNCTIONS


Maximum consumption 7560 W
Voltage/Frequency 220-240V 50-60Hz

MOTOR


Motor Brushless Motor 600 m³/h
Maximum capacity 515 m³/h I.E.C.61591
Maximum sound level 69 dB (A)re1pW I.E.C. 60704-2-13
Energy class A+

WEIGHTS AND VOLUMES


Gross weight 28.6 kg
Net weight 22.5 kg
Volume 0.24 m³
Packaging dimensions L 1055 x H 377 x P 610 mm




Cooking zones layout

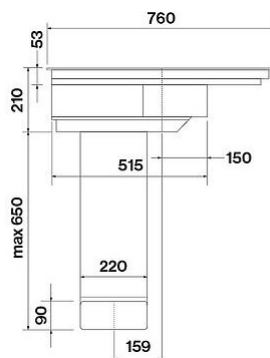


Frontal view

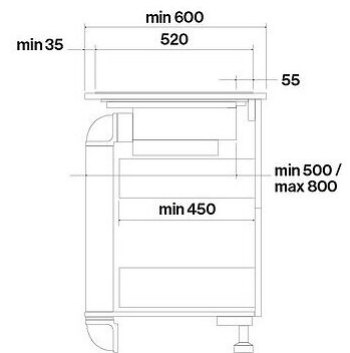


Side view




Top view




Topmounted installation



Hole dimensions




Flushmounted installation



Hole dimensions

Optional accessories

Code	Description
KACL.1043	Regenerable Carbon.Zeo Microtech filter (spare part) (1x)
KACL.1036	Anti-noise conveyer
KACL.155#NF	Black frame - 84 cm

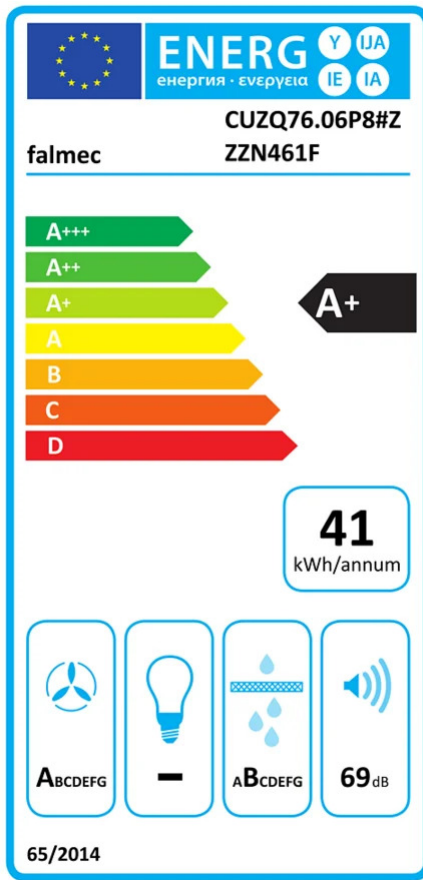

PF		
S		
M	Worktop - 76 cm - Black glossy/red LED - 600 m3/h	
AEC	41.40	kWh/a
EEC	A+	
FDE	34.80	
FDEC	A	
LE	0.00	
LEC		
GFE	87	
GFEC	B	
Qmin	250	m ³ /h
Qmax	495	m ³ /h
Qboost	515	m ³ /h
SPEmin	57	dBa
SPEmax	69	dBa
SPEboost	70	dBa
PO		
PS	0.48	W
PI		
F	0.80	
EEL	39.70	
Qbep	305	m ³ /h
Pbep	665	Pa
Qboost	515	m ³ /h
Wbep	162	W

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.