

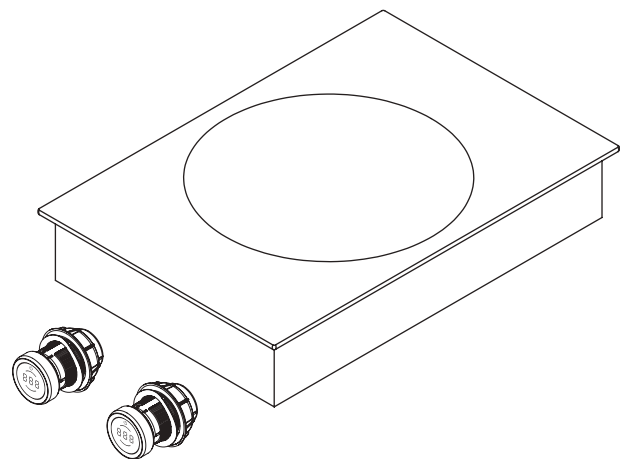
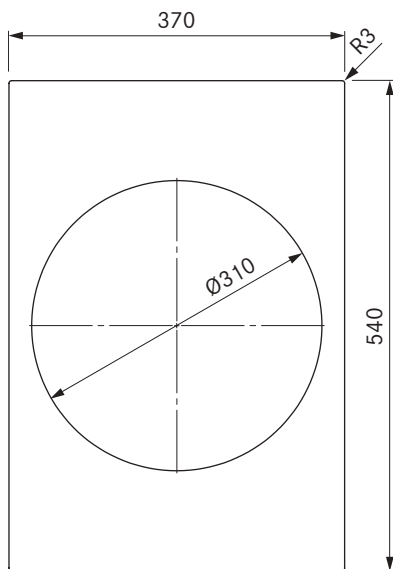


PKIW3 / PKIW3AB

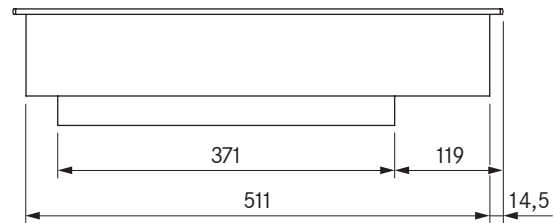

Pro induction wok cooktop

Pro induction wok cooktop All Black

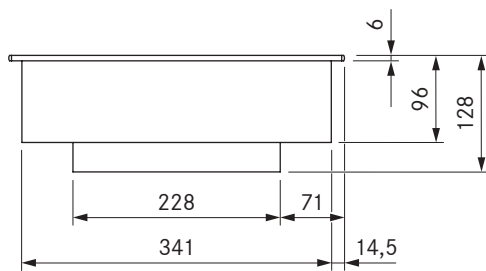

Technical data

Supply voltage	220 – 240 V
Frequency	50/60 Hz
Maximum power consumption	3.0 kW
Maximum power rating	3.0 kW
Minimum fuse protection	1 x 16 A
Power supply cable length	1,5 m
Dimensions (width x depth x height)	370 x 540 x 128 mm
Weight (incl. accessories/packaging)	9.5 kg
Surface material	SCHOTT CERAN®
Cooktop power levels	1 – 9, P
Size of cooking zone	Ø 310 mm
Cooking zone output	2400 W
Cooking zone power setting output	3000 W

Product description

- Intuitive control knob
- Variable heat retention function
- Childproofing feature
- Cooking zone timers
- Timer
- Pause function
- automatic heat up function
- Increased resistance against breakage
- Modular system
- Demo mode

Scope of delivery

- Induction wok cooktop PKIW3 / PKIW3AB
- 2 x control knobs
- 2 x connection cables for the control knobs
- Connection cable to the extractor
- operating and installation instructions
- height adjustment plate set
- mounting straps
- power supply cable (1,5m)

Accessories

- HIW1 induction wok, Controlinduc®, stainless steel, Ø 360 mm

Product- and planning instructions

- The installation height of 128 mm means that the device cannot be installed over the exhaust ducting
- Ensure sufficient ventilation of the area below the cooktop.
- Glass ceramic mould Diameter 310 mm
- Use a wok that loses its magnetic properties when the temperature rises (overheating protection). We recommend using the BORA induction wok.