

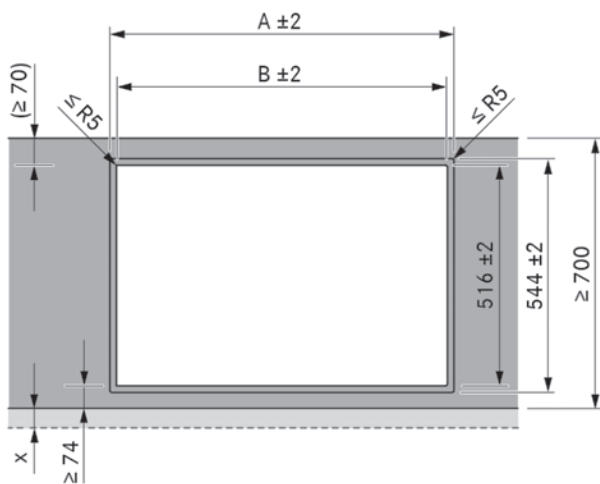


Cut-out dimensions




BORA Professional 3.0

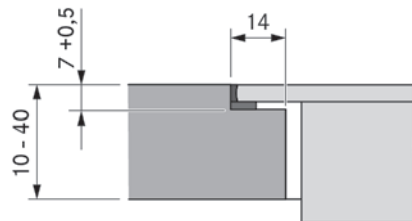

Flush installation

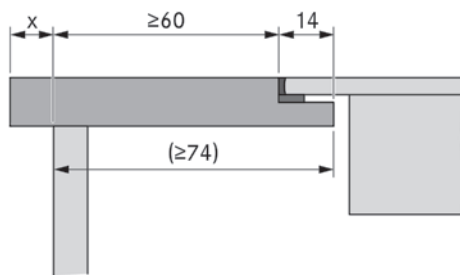

Surface mounting

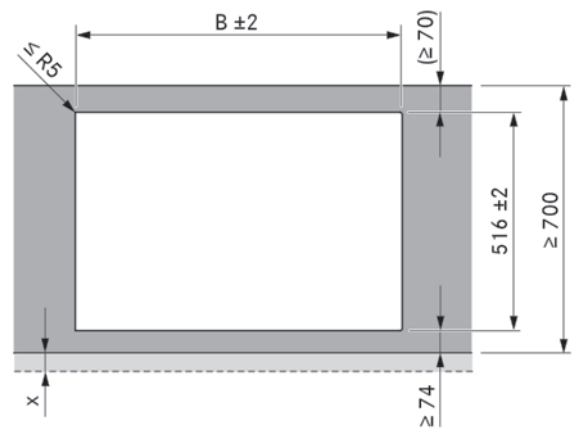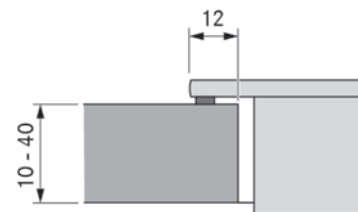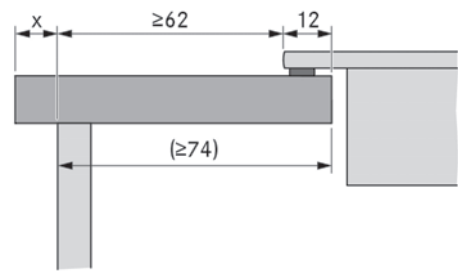

Cooktops/cooktop extractor

Combination

A in mm

B in mm



1/0

374

346



1/1

485

457



2/1

856

828



3/2

1338

1310



4/2

1709

1681

Important planning information:

- All dimensions are shown from the front edge of the front panel.
- Cut-out dimension tolerance ± 2 mm.
- Clearance of 1 mm should be provided between the built-in appliances.
- Clearance of 2 mm should be provided around the built-in appliances.
- Please note the worktop manufacturer's instructions on the suitability of the worktop. Worktop cut-outs must be moisture-sealed using suitable means or, where necessary, fitted with a thermal insulator (e.g. in the case of Corian or HiMacs worktops).
- When installation is complete, the appliance is to be sealed in using heat-resistant silicone sealant.