

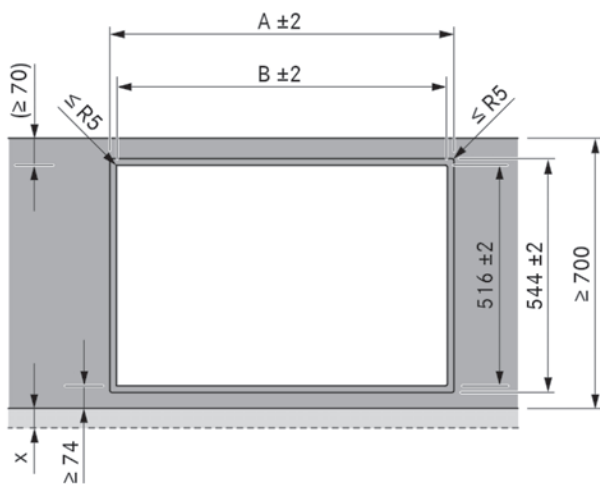


# Cut-out dimensions




BORA Professional 3.0

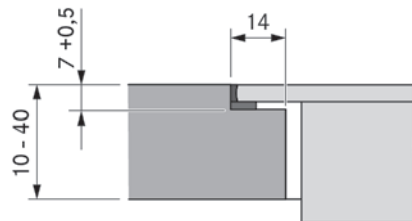

## Flush installation

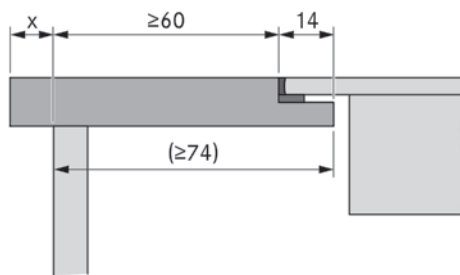

## Surface mounting

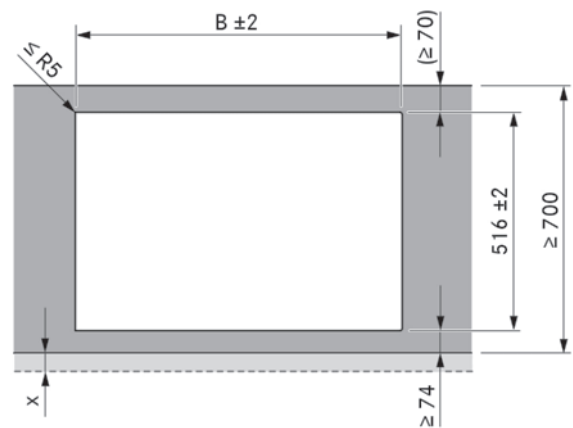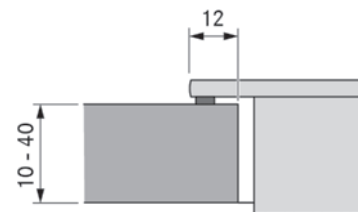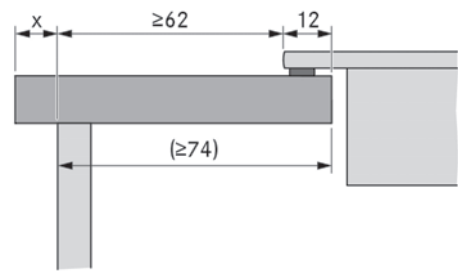

## Cooktops/cooktop extractor

### Combination

### A in mm

### B in mm



1/0

374

346



1/1

485

457



2/1

856

828



3/2

1338

1310



4/2

1709

1681

## Important planning information:

- All dimensions are shown from the front edge of the front panel.
- Cut-out dimension tolerance  $\pm 2$  mm.
- Clearance of 1 mm should be provided between the built-in appliances.
- Clearance of 2 mm should be provided around the built-in appliances.
- Please note the worktop manufacturer's instructions on the suitability of the worktop. Worktop cut-outs must be moisture-sealed using suitable means or, where necessary, fitted with a thermal insulator (e.g. in the case of Corian or HiMacs worktops).
- When installation is complete, the appliance is to be sealed in using heat-resistant silicone sealant.