


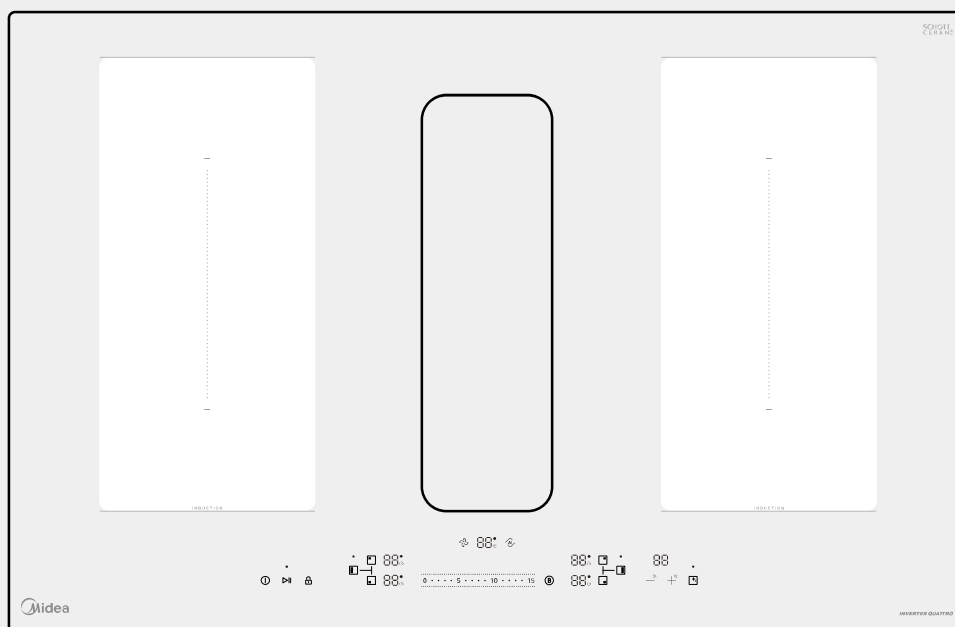

INDUCTION HOB

INSTALLATION MANUAL


MIH7480Y225GKH1Y

Warning notices: Before using this product, please read this manual carefully and keep it for future reference. The design and specifications are subject to change without prior notice for product improvement. Consult with your dealer or manufacturer for details. The diagram above is just for reference. Please take the appearance of the actual product as the standard.

PRODUCT INSTALLATION



Installation Notes

- The appliance requires 2 professional installers to install;
- Installation or maintenance must be performed by qualified technicians, in compliance with the manufacturer's instructions and local safety regulations. No part of the appliance may be repaired or replaced unless specifically stated in the operating manual;
- Once the installation is complete, the electrical components must no longer be touched by the user;
- Before connecting the appliance to the electrical network: check the nameplate (at the bottom of the appliance) to ensure that the voltage and power match the network values and that the connected socket is suitable.
- This appliance should be connected to a circuit containing an isolating switch to completely disconnect the power supply.
- Failure to properly install the appliance may invalidate any warranty or liability claim.
- The included material should be used for the best performance. If the air channels will be enlarged, the performance of the hood will be different.
- In case of a repair on the appliance, it is necessary to take care that the hood and duct is free accessible.

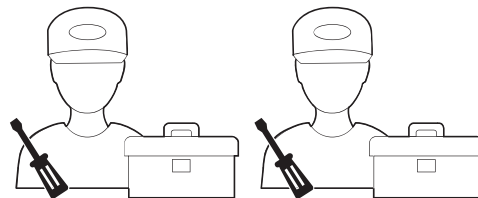

Installation Dimension Requirements

Unit: mm

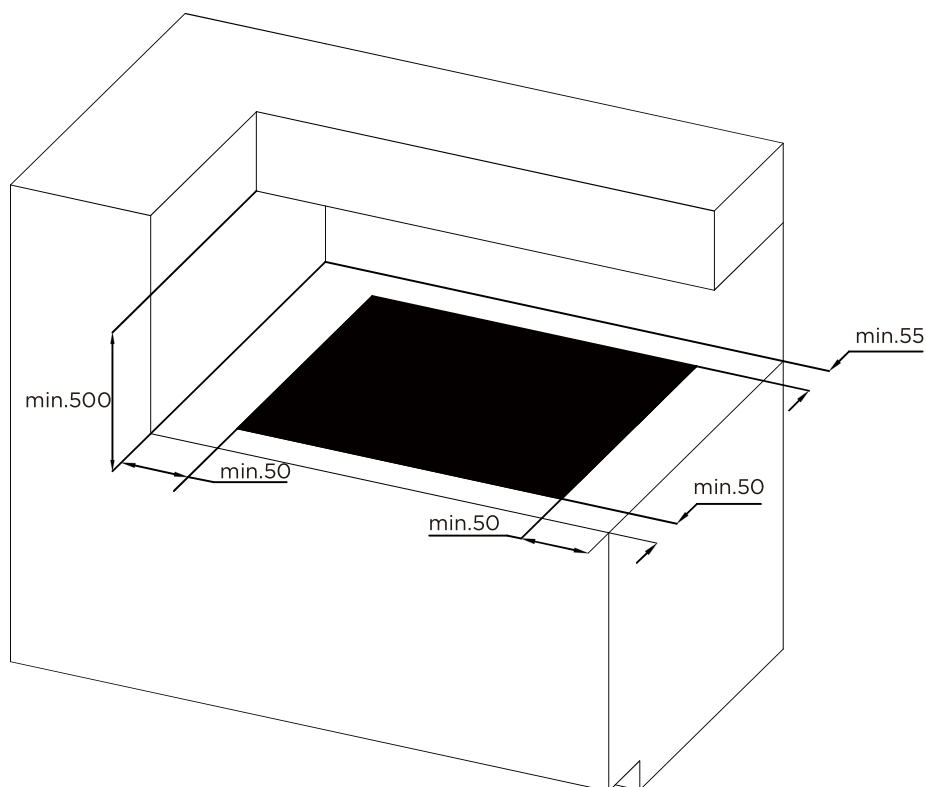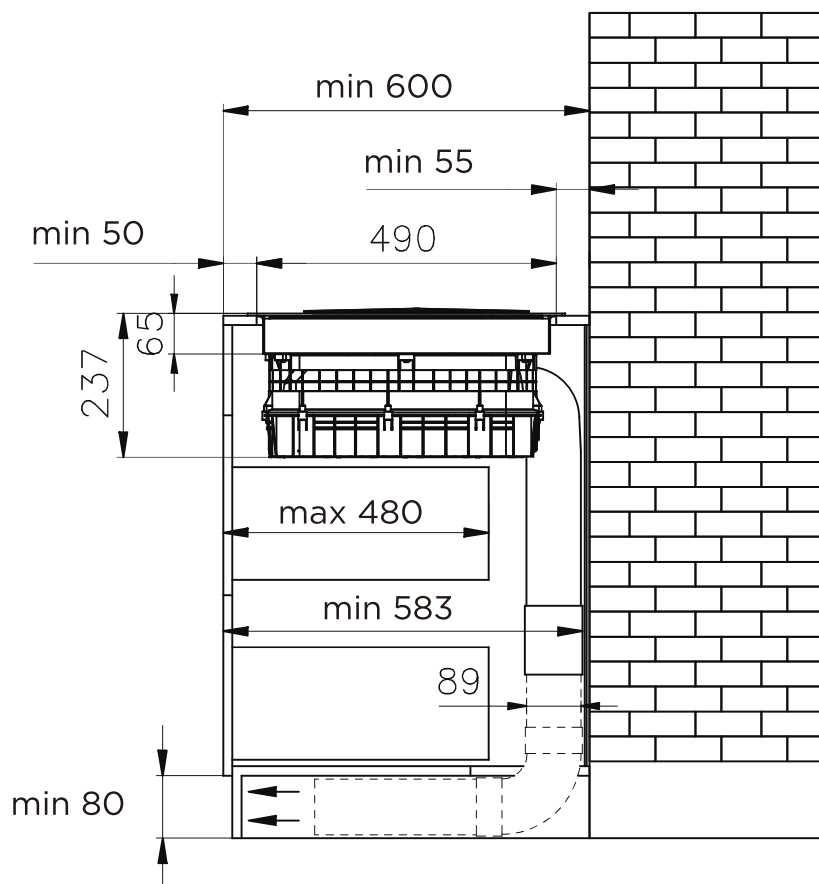


EN

Installation Dimension Requirements

In order to drain liquids conveniently, it is recommended to keep a minimum distance of 40mm between the baffle and the bottom of the hob. Follow the requirements below.

Request 1: Gap=50-A-B $\geq$ 5mm

Request 2: C $\geq$ 40mm easy to unscrew the Rubber plug

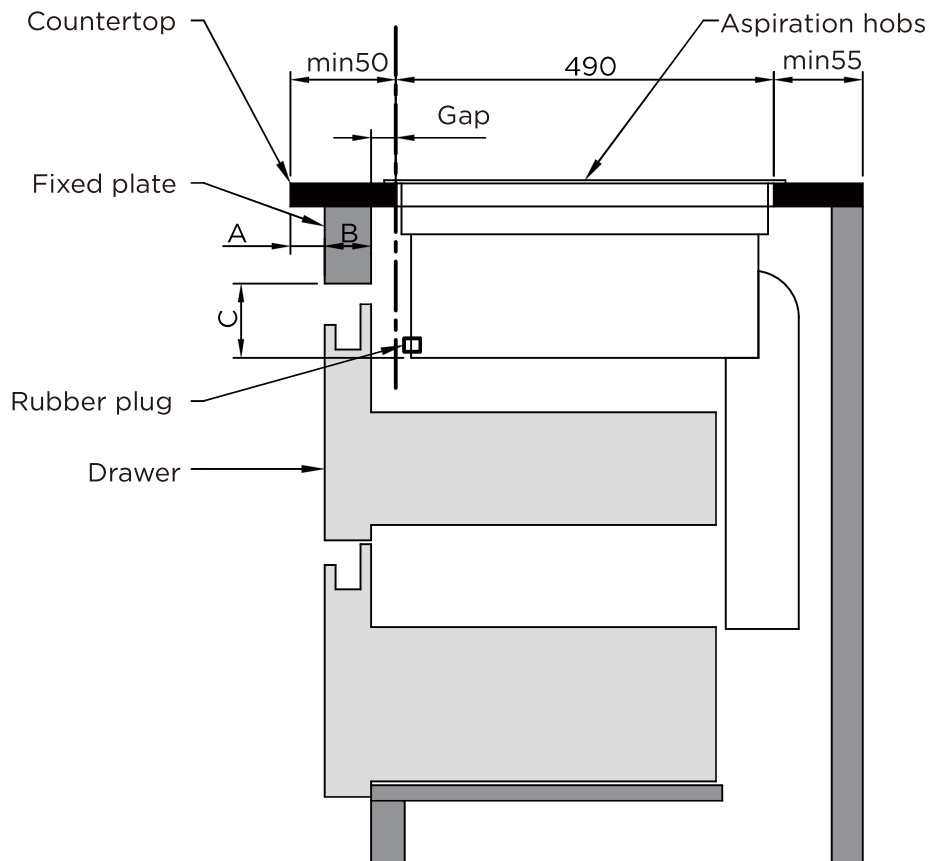


EN

- ⚠ There are ventilation holes around outside of the hob. You must ensure these holes are not blocked by the worktop when you put the hob into position.
- ⚠
 - Be aware that the glue that join the plastic or wooden material to the furniture, has to resist to temperature not below 150°C, to avoid the unstuck of the paneling.
 - The rear wall, adjacent and surrounding surfaces must therefore be able to withstand an temperature of 90°C.

Surface mounting


Unit: mm

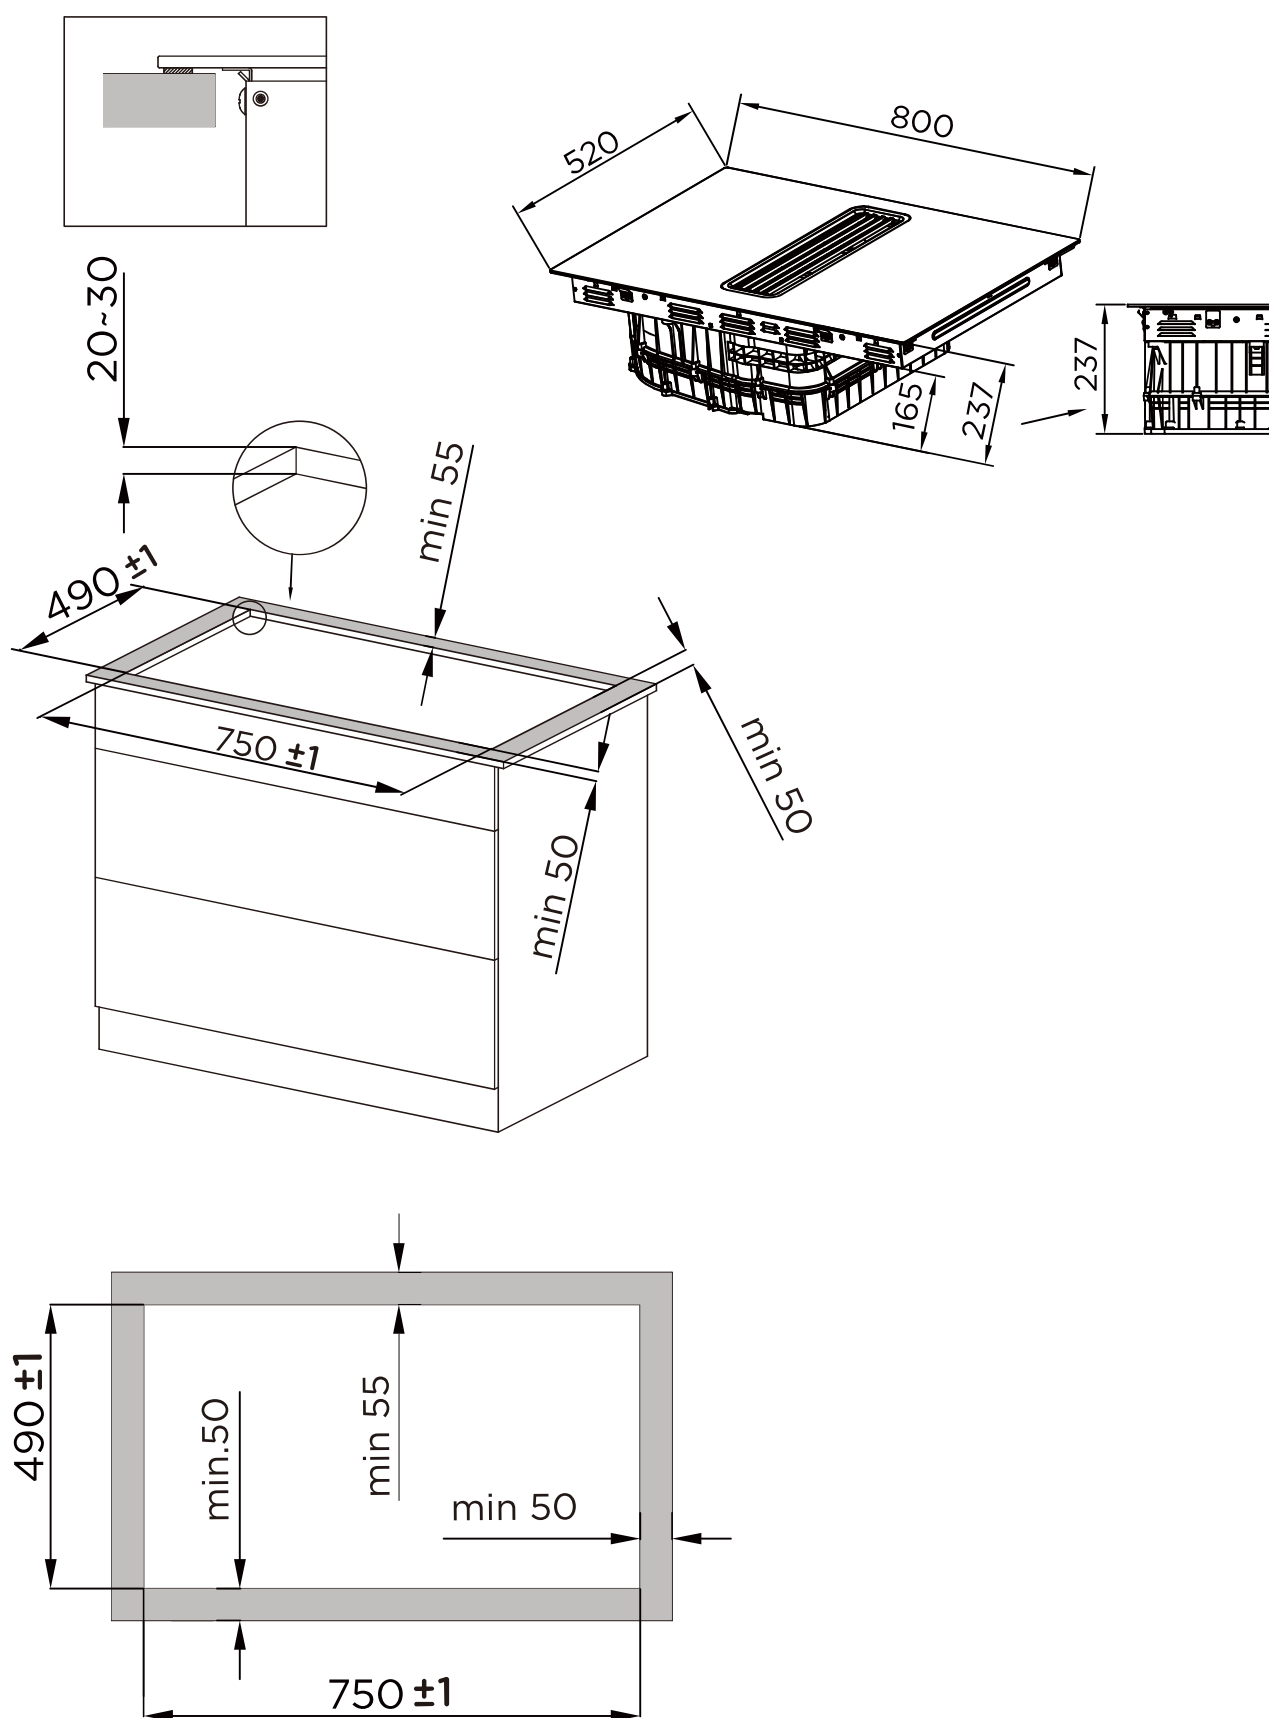

EN

Flush-fitting Installation Instruction

Unit: mm

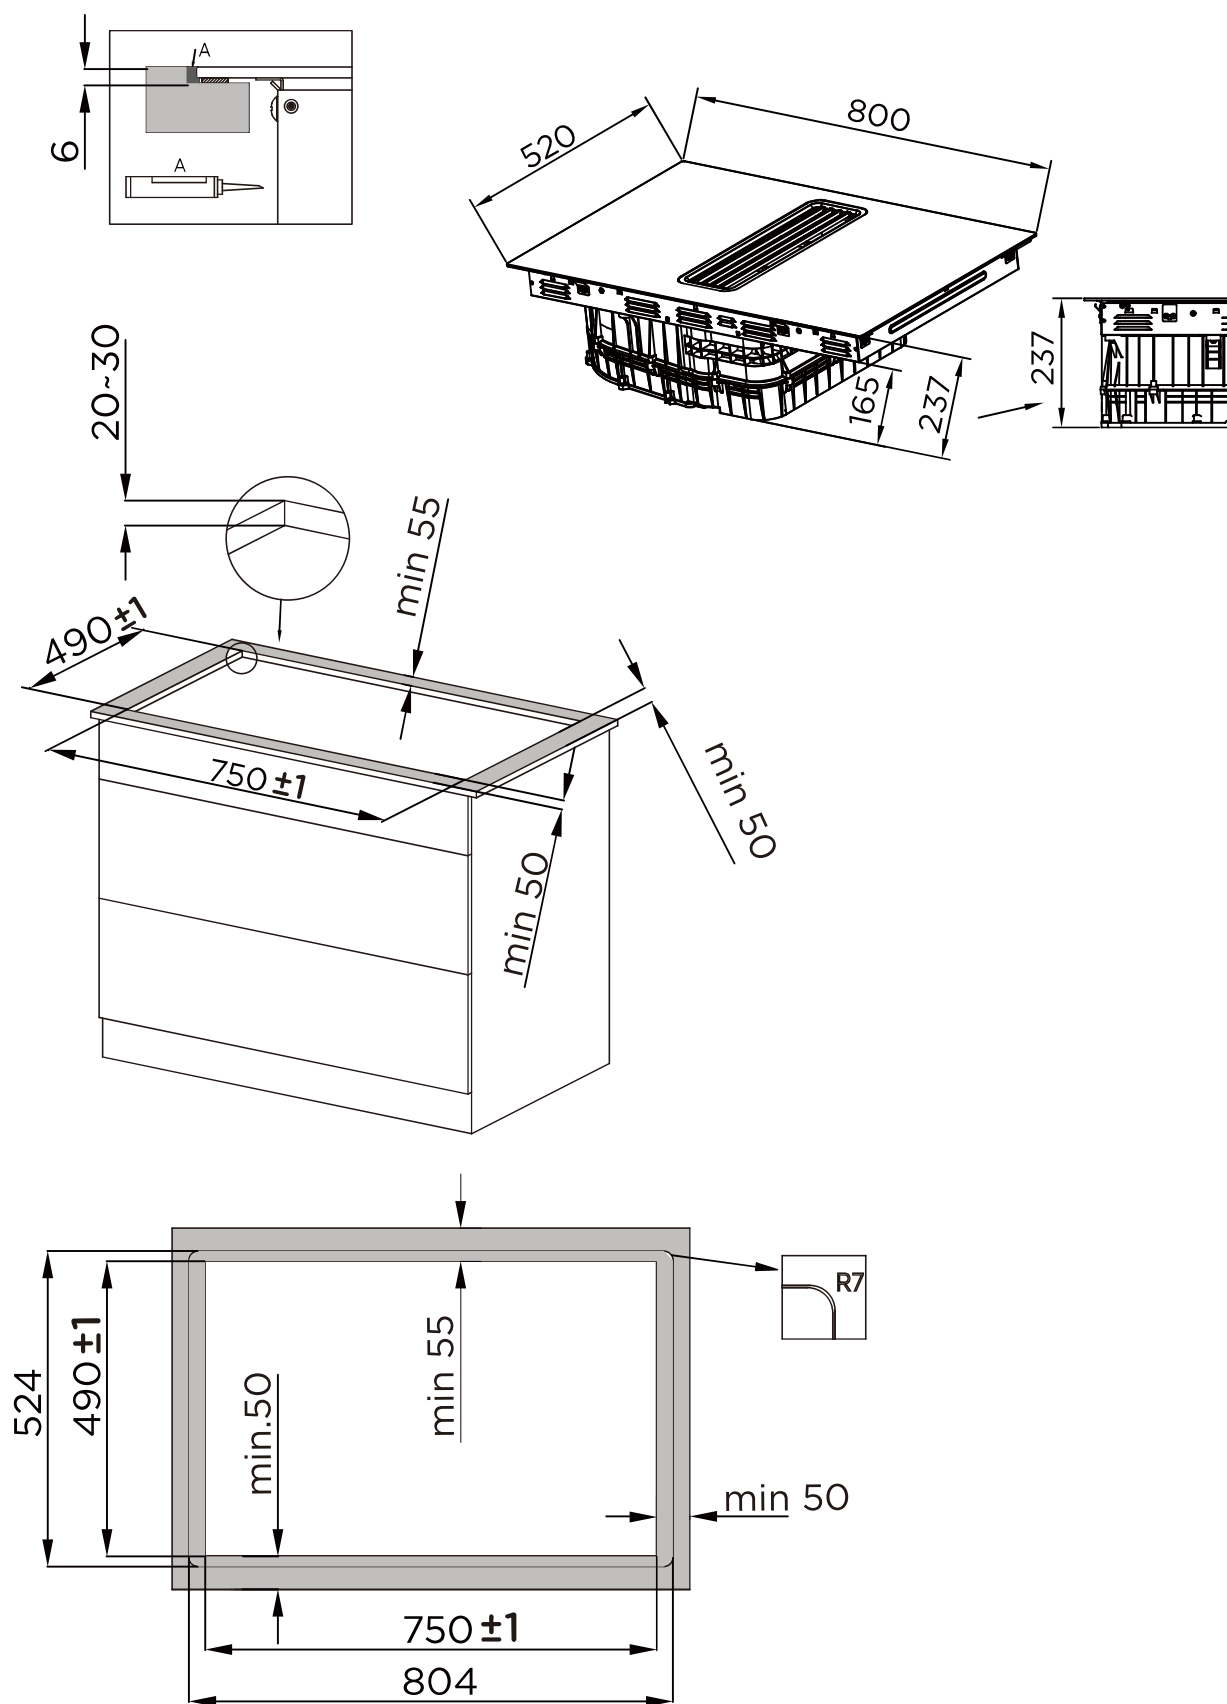



www.midea.com
© Midea 2022 all rights reserved

MIDEA	Midea Europe GmbH Ludwig-Erhard-Str,14, 65760 Eschborn, Germany	kundenservice@midea.com
	MIDEA ITALIA S.R.L. Via Luigi Bodio 29/37 -Milano (MI) 20158 Italy	assistenza@midea.com
	Midea Electrics France 253 RUE SAINT-HONORE 75001 PARIS	service_france@midea.com
	MIDEA HOME APPLIANCES UK LTD Conavon Court Ground Floor, 12 Blackfriars Street, Salford,Manchester M3 5BQ UK	service_uk@midea.com

Guangdong Midea Consumer Electric Manufacturing Co., Ltd 19 Sanle Road, Beijiao, Shunde, Foshan, Guangdong, China.

